
## 張出歩道 セーフティロード

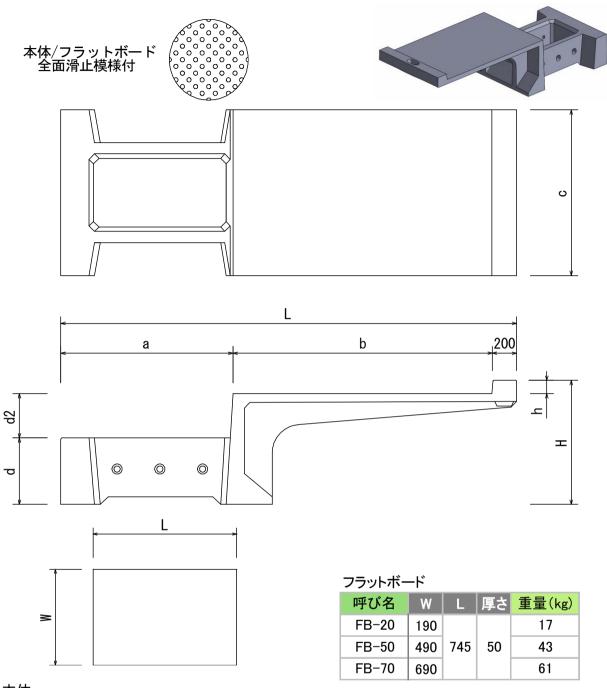

## 本体

77'17'										
呼び名	寸法(mm)								胴込量	参考重量
	Н	L	а	b	С	d	d2	h	(m3)	(kg)
SR-10	920	1670	650	800	1495	400	400		0.219	990
SR-15		2520	1000	1300			400	120	0.374	1430
SR15-10	1020						500		0.357	1540
NSR20	1020		1350	1800		500	400		0.683	1950
NSR20-10	1120	3370					500			2040
NSR20-20	1220						600			2130
NSR25	1120	-	1530	2300		600	400		0.916	2660
NSR25-10	1220						500			2790
NSR25-20	1320						600			2920
SR-30	1420	4470	1750	2800		900	400		1.541	4080